

Specification Sheet

Model # OC12WF-4B



MISCO®

Key Features:

- 12" (304 mm), 4 ohm
- Woofer, 100 watt
- Ferrite magnet, Black Talc Filled Polypropylene cone with Polyether Foam surround;

Product Specifications & Parameters

Primary Specifications

Speakers Environment	Indoor
RoHS Compliant	No

Technical Specifications

		Units of Measure
Nominal Basket Diameter	12.0	inch
	304.0	mm
Rated Impedance	4	ohms
Rated Power	100.0	Watts
Program Power	200	Watts
Frequency Range	25 - 1500	Hz
Sensitivity (2.83 V input measured at 1 Meter)	92	dB SPL
Voice Coil Diameter	2.0 / 50.8	inch / mm
Magnet Weight	38.0 / 1079	oz / gr
Transformer		


Small Signal Parameters

		Units of Measure
Resonant Frequency (fo)	31	Hz
D.C. Resistance (Re)	3.6	ohms
Mechanical Q (Qms)	8.9	
Electrical Q (Qes)	0.49	
Total Q (Qts)	0.47	
Compliance Equivalent Volume (Vas)	152.9	ltr
BL Product (BL)	9.6	T-M
Maximum Linear Excursion (Xmax)	5.8	mm
Surface Area of Cone (Sd)	523.0	cm ²
Moving Mass (Mmd)		g

Material Descriptions

Basket	Stamped Steel
Terminal Size	0.25 X 0.03
Magnet	Ferrite
Voice Coil Wire	Copper
Voice Coil Form	Kapton
Cone	Black Talc Filled Polypropylene
Cone Edge	Polyether Foam
Dust Cap	Plastic

Sensitivity / Frequency

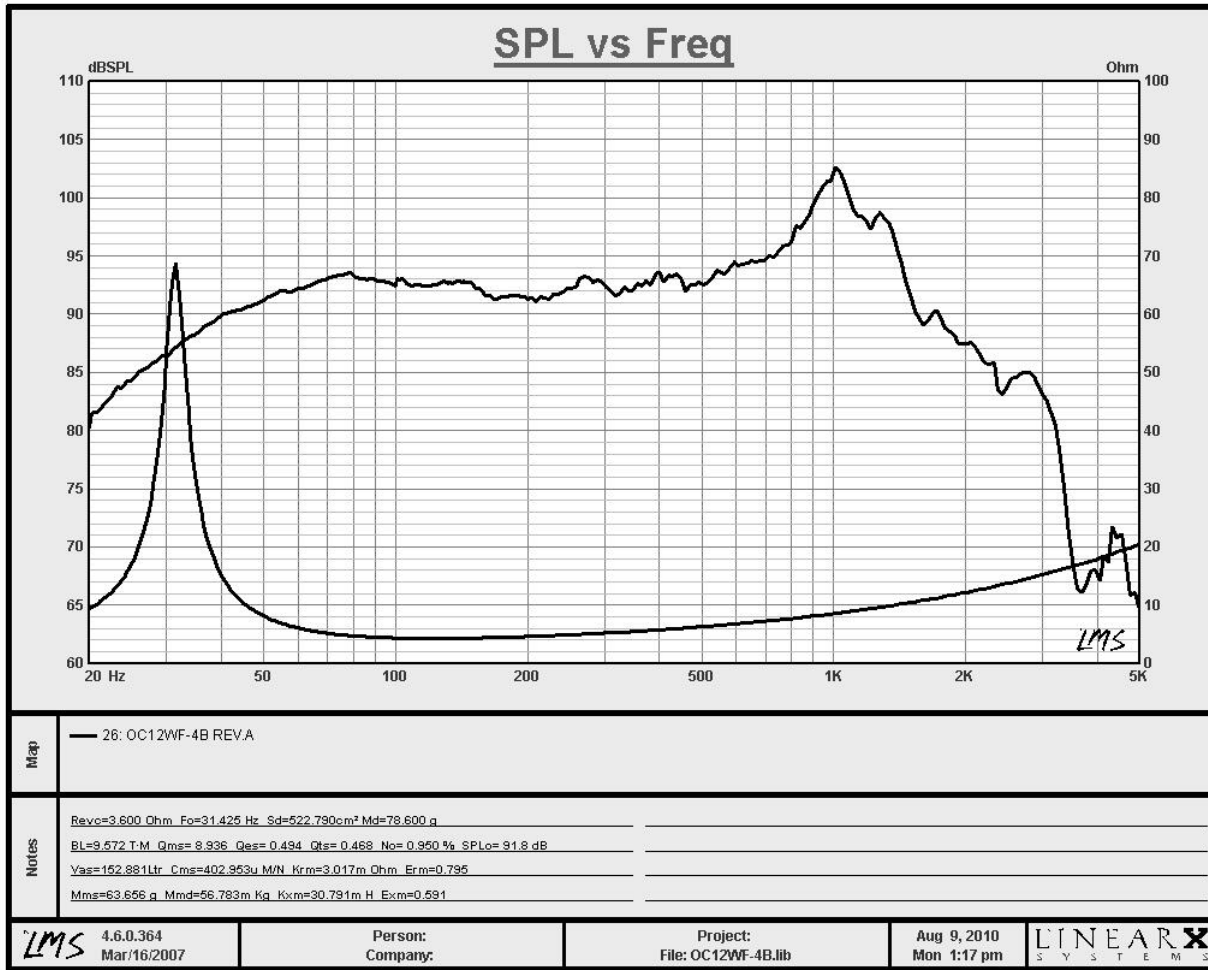

Drawing

ID	Description	Measurements	Tolerance
Od	Outside Diameter	12.2 in.	+/- 0.020"
CD	Cutout Diameter	11.1 in.	+/- 0.020"
MG	Magnet Diameter	5.3 in.	+/- 0.050"
HD	Hole Diameter	0.3 in.	+/- 0.010"
MD	Mounting Diameter	11.3 in.	+/- 0.010"
ID	Internal Depth	5.3 in.	+/- 0.025"
FT	Flange Thickness	0.23 in.	+/- 0.050"
NW	Net Weight	3833.0 g	

