

Specification Sheet

Model # 100SF08-2



MISCO®

Key Features:

- 4" (100mm), 8 ohm
- Full Range, 6 watts
- Ferrite magnet, paper cone
- RoHS Compliant;

Product Specifications & Parameters

Primary Specifications

Speakers Environment	Indoor
RoHS Compliant	Yes

Technical Specifications

		Units of Measure
Nominal Basket Diameter	4.0	inch
	100.0	mm
Rated Impedance	8	ohms
Rated Power	6.0	Watts
Program Power	12	Watts
Frequency Range	145 - 17000	Hz
Sensitivity (2.83 V input measured at 1 Meter)	87	dB SPL
Voice Coil Diameter	0.7 / 17.8	inch / mm
Magnet Weight	10.0 / 284	oz / gr
Transformer		


Small Signal Parameters

		Units of Measure
Resonant Frequency (fo)	145	Hz
D.C. Resistance (Re)	7.1	ohms
Mechanical Q (Qms)	5.6	
Electrical Q (Qes)	1.66	
Total Q (Qts)	1.28	
Compliance Equivalent Volume (Vas)	3.1	ltr
BL Product (BL)	2.6	T-M
Maximum Linear Excursion (Xmax)	1.0	mm
Surface Area of Cone (Sd)	54.0	cm ²
Moving Mass (Mmd)		g

Material Descriptions

Basket	Stamped Steel
Terminal Size	.205 X .020
Magnet	Ferrite
Voice Coil Wire	Copper
Voice Coil Form	Paper
Cone	Paper
Cone Edge	Polyether Foam
Dust Cap	Mylar

Sensitivity / Frequency

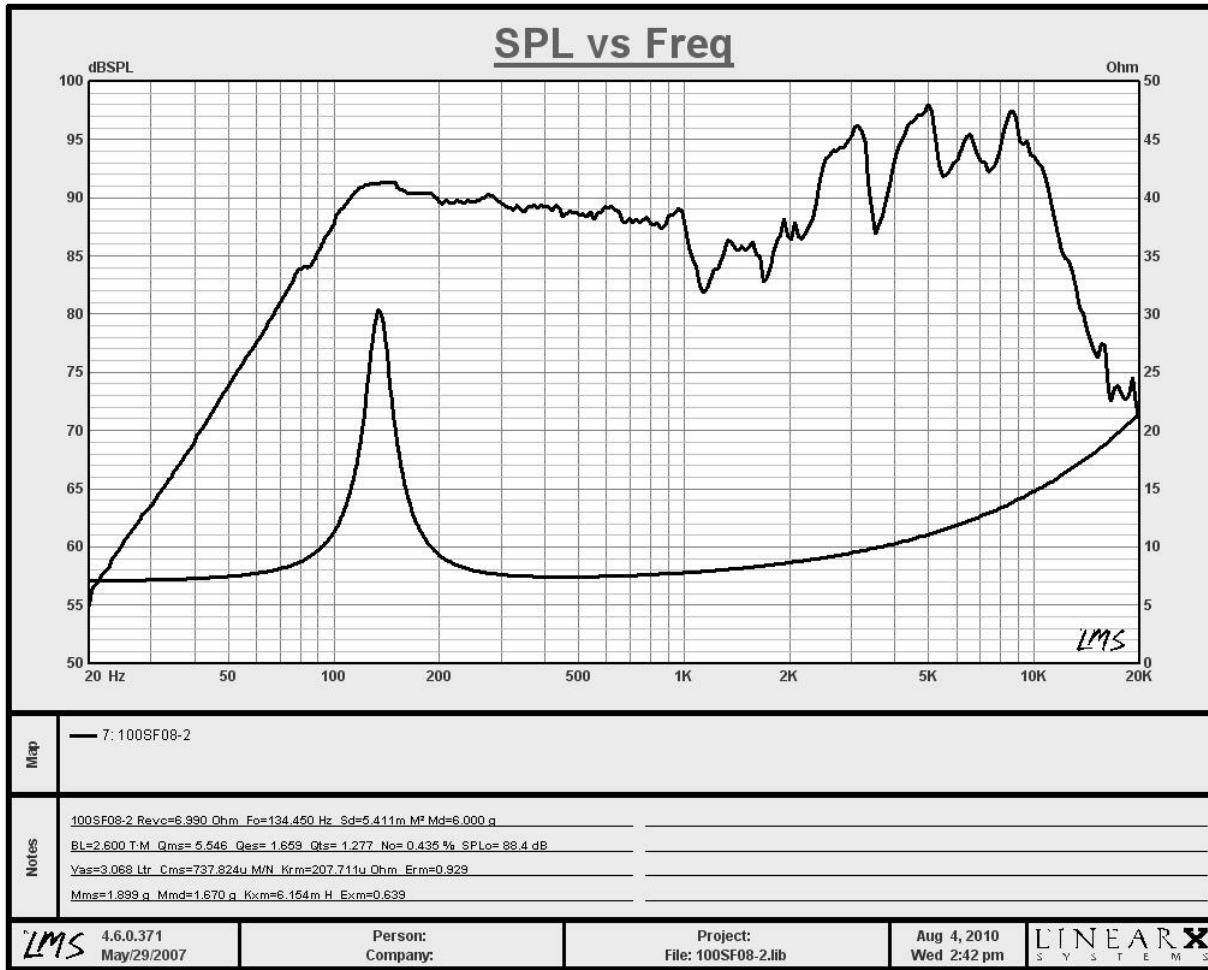

Drawing

ID	Description	Measurements	Tolerance
Od	Outside Diameter	4.0 in.	+/- 0.020"
CD	Cutout Diameter	3.7 in.	+/- 0.020"
MG	Magnet Diameter	2.2 in.	+/- 0.050"
HD	Hole Diameter	0.2 in.	+/- 0.010"
MD	Mounting Diameter	4.6 in.	+/- 0.010"
ID	Internal Depth	1.4 in.	+/- 0.025"
FT	Flange Thickness	0.1 in.	+/- 0.050"
NW	Net Weight	223.0 g	

