


The AX-1364-M is a 6" integrated transit speaker, 70 volt transformer, and bushed aluminum grille specially designed for railcar applications. This model's custom mounted terminal strip allows multiple connection methods to best fit a system's electrical configuration.

- Voice range speaker
- 6" (152 mm) basket diameter
- 12 watts, 8 ohm
- 70 watt transformer, taps 1, 2, and 4 watts
- Ferrite magnet, acrylic treated paper cone
- Bushed aluminum grille

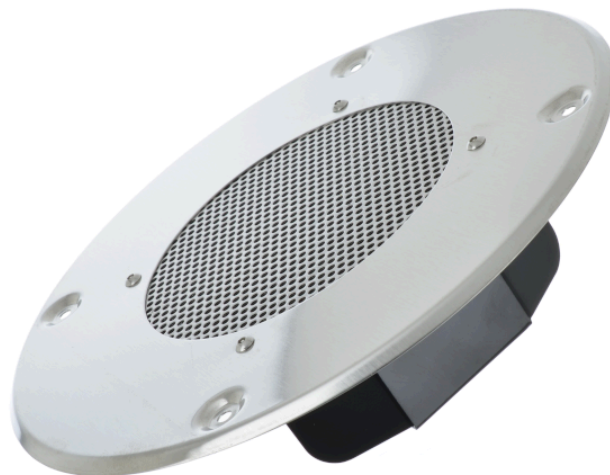

#### Primary Specifications

<b>Size, Nominal (inch &amp; mm)</b>	6" (152 mm)
<b>Rated Impedance (<math>\Omega</math>)</b>	8
<b>Frequency Range (Hz)</b>	80 - 8, 500
<b>Resonant Frequency (Fs) (Hz) +/- 15%</b>	120

### More Specifications

<b>Application</b>	Indoor, Transit, Voice Communications
<b>RoHS Compliant</b>	No
<b>DC Resistance (Re) (<math>\Omega</math>)</b>	8
<b>Program Power (W)</b>	12

### Small Signal Parameters

<b>Nominal Impedance (Z) (<math>\Omega</math>)</b>	8
<b>DC Resistance (Re) (<math>\Omega</math>)</b>	8
<b>Resonant Frequency (Fs) (Hz) +/- 15%</b>	120
<b>Total Q Factor (Qts)</b>	1.50

### Material Descriptions

<b>Basket Type</b>	Stamped steel
<b>Magnet Material</b>	Ferrite
<b>Magnet Weight (g)</b>	136.08
<b>Cone Body Material</b>	Treated paper
<b>Cone Surround Material</b>	Treated cloth

